




# Relay Interface Board

**CON\_R\_AUX4**

## Description

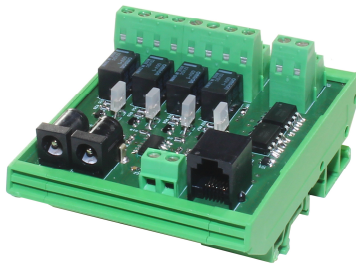

The CON\_R\_AUX4 is developed for the simple and clear connection of external peripherals to the CS141 SNMP / Web / Modbus Manager. To these devices belong switches, sensors, warning lamps, SPS, audible and optical alarm indicators etc. This device is connected to the AUX Port of the CS141. The CON\_R\_AUX4 possesses 4 digital inputs and 4 relay outputs, whose state will be displayed via LEDs. With the usage of the CON\_R\_AUX4, you are able to connect external devices to the CS141, which require potential-free relay outputs and/or are installed at most 100 meters away from the connection terminal. The CS141 can be supplied through the extension connector of the CON\_R\_AUX4 with the power supply cable PWRCH, so that only one power supply for both devices is required.

Scope of delivery:

- Connector cable RJ12/6\_1, 1m
- 12 V/1A power supply

Optional equipment:

- Power supply cable PWRCH, 2m

## Technical Data


Digital Inputs: .....	4
Relay-Outputs: .....	4
CS141 AUX Interface: .....	1
Input data: .....	12V
Output data: .....	1A at 24V DC, 0,5A at 48V AC
External power supply: .....	12V
Supply connections for external devices: .....	12V / 200mA
Housing: .....	Synthetic
Weight: .....	100g
Dimension W x L x H: .....	68 x 78 x 40 mm
Mounting: .....	35 mm DIN top hat rail or wall holder



# Relay Interface Board

**CON\_AUX4**

## Description

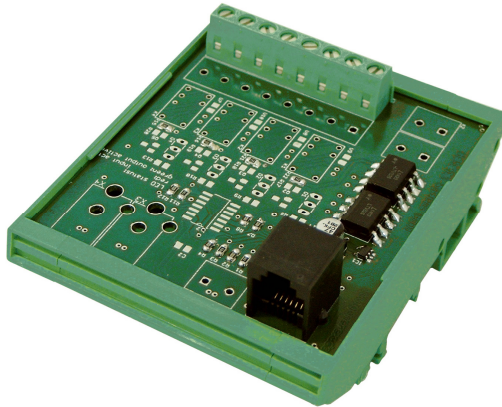

The CON\_AUX4 is developed for the simple and clear connection of external Sensors to the CS141 SNMP / Web / Modbus Manager. This device is connected to the AUX Port of the CS141. The CON\_R\_AUX4 possesses 4 digital inputs. With the usage of the CON\_AUX4, you are able to connect external sensors to the CS141, which are installed at most 100 meters away from the connection terminal.

Scope of delivery:

- Connector cable RJ12/6\_1, 1m

## Technical Data

Digital Inputs: .....	4
Relay-Outputs: .....	-
CS141 AUX Interface: .....	1
Input data: .....	5V / 12V
Output data: .....	-
External power supply: .....	-
Supply connections for external devices: .....	-
Housing: .....	Synthetic
Weight: .....	100g
Dimension W x L x H: .....	68 x 78 x 40 mm
Mounting: .....	35 mm DIN top hat rail or wall holder